

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁷ :

H04L 1/20, H04B 17/00

A1

(11) International Publication Number:

WO 00/70815

(43) International Publication Date: 23 November 2000 (23.11.00)

(21) International Application Number: PCT/EP99/03383

(22) International Filing Date: 17 May 1999 (17.05.99)

(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HAPPONEN, Aki [FI/FI]; Rysékuja 5, FIN-90900 Kiiminki (FI). PIIRAINEN, Olli [FI/FI]; Pikisaarentie 1 E 11, FIN-90100 Oulu (FI).

(74) Agents: PELLMANN, Hans-Bernd et al.; Tiedtke-Bühling-Kinne et al., Bavariaring 4, D-80336 München (DE).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: A METHOD FOR NOISE ENERGY ESTIMATION IN TDMA SYSTEMS

(57) Abstract

The present invention proposes a method for estimating a signal variance of a received signal (y) transmitted via a transmission channel, said method comprising the steps of: estimating the energy (RSSI) of the received signal (y), estimating the energy (E_{\max}) of channel impulse response (h) taps, and estimating said signal variance (VAR) of said received signal by subtracting said estimated energy of channel impulse response taps (E_{\max}) from said estimated energy (RSSI) of said received signal, such that said signal variance is obtained as $\text{VAR} = \text{RSSI} - E_{\max}$. The present invention also proposes a correspondingly adapted device.

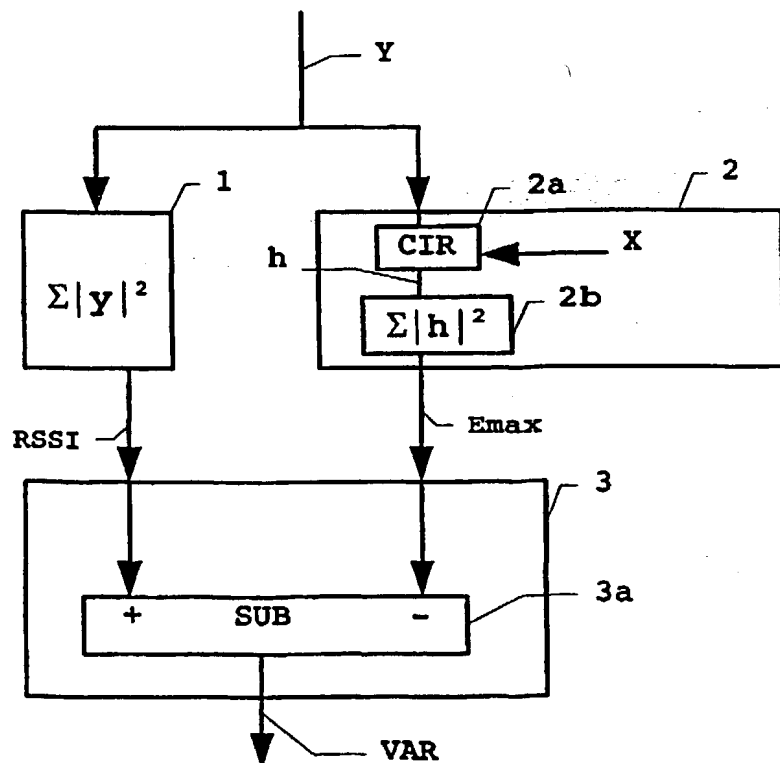

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A METHOD FOR NOISE ENERGY ESTIMATION IN TDMA SYSTEMS

FIELD OF THE INVENTION

5 The present invention relates to a method and corresponding device for noise energy estimation and/or variance .. estimation of a signal transmitted via a transmission channel. Particularly, the present invention concerns such a method and device to be used in connection with a radio
10 telecommunication system.

BACKGROUND OF THE INVENTION

Recently, mobile radio telecommunication systems have
15 widely spread. Such mobile radio telecommunication systems operate for example according to a commonly agreed standard, like for example the GSM standard. According to GSM standard, data transmission is performed according to a method of time divisional multiple access (TDMA). The TDMA
20 transmission principle specifies that data are transmitted from a transmitter to a receiver and vice versa only during respectively specified time slots of frames.

Data transmission in such telecommunication systems
25 substantially relies on digital data transmission. However, between a mobile radio transceiver device as a subscriber terminal (hereinafter: mobile station MS) and a stationary radio transceiver device as a serving radio network element (hereinafter: base station BS) data have necessarily to be
30 transmitted as analogue data via the air interface Um (representing the transmission channel of interest).

Consequently, data transmitted by the mobile station MS are received via a base station antenna means of a reception
35 device of the base station BS as analogue data. In the

course of the further processing of the thus received data by the reception device, the analogue data are analog to digital converted, i.e. passed through an A/D converter means. At the next stage of the processing, the obtained
5 digital data are supplied to an equalizer means for being equalized. The thus obtained output data are then supplied to a channel codec means for coding/decoding the data. At the reception side, decoding is performed to separate received speech data from associated signaling data.

10

Particular attention in the course of this processing has to be paid to the equalizing of the received data, since the equalizing is required to reconstruct, at the reception side, the transmitted signal from a mixture of received
15 signals.

For example, assuming a situation in a radio telecommunication network with a base station BS and only a single mobile station MS present in the radio coverage area of the
20 base station. Then, a signal s transmitted from the mobile station MS may reach the base station BS directly via line of sight at a time $s(t)$. However, the same signal s may be deflected by, e.g., a building, a mountain or the like present in the environment. Thus, the same signal may reach
25 the base station BS at a later point of time $s(t+T)$, and is thus superposed to the signal $s(t)$. Due to the delay T , both received signals are no longer in phase with each other. Moreover, the delayed signal $s(t+T)$ may even be more attenuated than the signal $s(t)$ due to the longer
30 transmission path. Thus, the signal received by the base station BS and originating from the mobile station MS is distorted. Now, assuming that another mobile station MS' is additionally present, then signals $s'(t')$, $s'(t'+T')$ are additionally received by the base station BS, which may

lead to interference between the respective transmitted data symbols (intersymbol interference).

Therefore, an equalizer means has to reconstruct (detect) the initially transmitted signal $s(t)$ and/or $s'(t')$ from the received mixture of signals $s(t)$, $s(t+T)$, $s'(t')$, $s'(t'+T')$.

The thus reconstructed (or detected) signal is required to be as similar to the originally transmitted signal as possible. This reconstruction is therefore a main concern when designing equalizers, e.g. for use in a reception device (receiver) of a base station BS.

As regards the adopted channel model in such a case, each of the above mentioned delayed signals forms a term of a respective FIR model of the channel impulse response function and represents a so-called tap. Based on the values of such taps, poles and zeroes of the transmission function can be calculated.

On a receiver side, it is necessary to have a knowledge of the quality of the received signal. This quality of the received signal is represented by the noise energy (variance) of the received signal. The knowledge of signal quality as represented by the noise energy is then used in a respective receiver (e.g. in connection with equalization).

In mobile communication systems, the noise energy of the received signal has to be estimated from the stream of received data.

According to previous solutions, the noise energy is calculated from the difference between the received signal

on one hand and the result of a convolution processing of a training sequence (known to the receiver and also transmitted via the transmission channel and therefore contained in the received signal) and an estimated channel impulse response. An example thereof is described in document EP-B1-0 428 199.

However, performing a convolution processing requires a powerful digital signal processor device at the receiver side with a large data memory for intermediate storage of the convolution results. Moreover, due to the complexity of a convolution processing, such a processing is also rather time consuming.

Additionally, in receivers which are particularly adapted to receive and reconstruct transmitted speech data, noise energy is estimated based on the Viterbi algorithm. An example thereof is described in applicants former document WO 97/08841.

However, also an implementation of the Viterbi algorithm requires a powerful digital signal processor device at the receiver side with a large data memory for intermediate storage of the convolution results.

SUMMARY OF THE INVENTION

Consequently, it is an object of the present invention to provide a method and corresponding device for estimating a signal variance of a received signal transmitted via a transmission channel, which is free from the above discussed drawbacks inherent to the solutions according to known prior art.

According to the present invention, this object is achieved by a method for estimating a signal variance of a received signal transmitted via a transmission channel, said method comprising the steps of estimating the energy of the
5 received signal, estimating the energy of channel impulse response taps, and estimating said signal variance of said received signal by subtracting said estimated energy of channel impulse response taps from said estimated energy of said received signal, such that said signal variance is
10 obtained as $VAR = RSSI - E_{max}$.

Furthermore, according to the present invention, this object is achieved by a device for estimating a signal variance of a received signal transmitted via a
15 transmission channel, said device comprising first estimation means adapted to estimate the energy of the received signal, second estimation means adapted to estimate the energy of channel impulse response taps, and third estimation means adapted to estimate said signal
20 variance of said received signal and comprising a subtracting unit adapted for subtracting said estimated energy of channel impulse response taps from said estimated energy of said received signal, such that said signal variance is obtained as $VAR = RSSI - E_{max}$.

25
Favorable refinements of the present invention are as set out in the respective dependent claims.

Thus, the present invention advantageously provides a very
30 simple method to estimate the noise energy, i.e. variance of a received signal. Particularly, the calculation is significantly simpler than a convolution based variance estimation.

Furthermore, the present invention can be beneficially used in the above mentioned receivers, where the data memory of used digital signal processor devices is limited, since it requires less data memory than prior art implementations
5 for noise energy estimation.

This also adds more flexibility to the respective receiver devices and enables new and improved receiver algorithms to be implemented.

10

Additionally, in those receivers, needed calculation results are immediately available, and only minor modifications to existing receivers are necessary.

15 Moreover, the present invention can be implemented in any receiver device adapted to operate according to the TDMA transmission principle, and can thus be used in all base stations conforming to GSM specification.

20 In addition, the method and device for variance estimation as proposed in this application, can be used in combination with the method and device as proposed in applicants former (still unpublished) patent application PCT/EP 98/04562 dealing with channel impulse response estimation using
25 received signal variance, filed on July 21, 1998, for use in receiver devices, thereby improving receiver sensitivity.

Preferred embodiments of the present invention are now
30 described herein below in detail by way of example with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a schematic block circuit diagram of a basic implementation of a device according to the present invention; and

- 5 Fig. 2 shows a modification of the basic implementation shown in Fig. 1.

DESCRIPTION OF PREFERRED EMBODIMENTS

- 10 According to the present invention, the noise energy and/or variance of a received signal is no longer calculated as the difference between the received signal and the result of a convolution processing of a training sequence and estimated impulse response of the transmission channel, as
15 it is performed in the know prior art.

Instead, the present invention is based on the idea that the received signal is the original signal plus a noise component. Hence, the noise component is the received
20 signal minus the original signal. Moreover, the noise energy represents the variance of the received signal. The variance is thus estimated based on the energy of the received signal and the energy of impulse response taps. More specifically, according to the present invention, the
25 variance is estimated as the difference between the energy of the received signal and the energy of the impulse response taps, as will be subsequently explained in terms of both, the method and device according to the present invention.

30

It should be noted that in the present description "energies" are average energies of a respective signal and are thus to be divided by a length of signal symbol sequences in order to obtain an average energy of a signal
35 per symbol. The length of a symbol sequence is represented

by a number N of symbols contained in the sequence. Also, an expression of "energy of signal" is intended to mean an energy of a signal per symbol.

5 Generally, a received signal y also contains a training sequence X . The training sequence is known beforehand to the system and is also transmitted as a part of the data transmitted during a time slot of a TDMA frame as a so-called data burst.

10

In the following, particular attention is firstly paid to the description of the principles underlying the method according to the present invention.

15 To this end, the received signal is assumed to be expressed by the following formula:

$$Y = Xh + w \quad \dots(1)$$

20 where Y denotes the received signal transmitted via the transmission channel, X represents the training sequence, h denotes an estimated channel impulse responses and w denotes the noise contained in the received signal. It should be noted that bold letters in this and following
25 formulas indicate that the respective quantity/variable is in vector and/or matrix representation.

If the above equation (1) is transformed such that both sides of the formula are expressed as the respective energy
30 E , this reads as follows:

$$E(Y^H Y) = E((Xh + w)^H (Xh + w)) \quad \dots(2)$$

Under the assumption, that the data, i.e. the received signal Y and the noise w are uncorrelated, the right side of equation (2) can be rewritten as follows:

$$5 \quad E(Y^H Y) = E(h^H X^H X h) + E(w^H w) \quad \dots (3)$$

Apparently, in equation (3) the term $E(w^H w)$ represents the energy of noise, while the term $E(h^H X^H X h)$ represents the energy of the signal, and $E(Y^H Y)$ represents the energy of the received signal.

Now, an approximation can be made to the end that $(X^H X)$, i.e. the product of the conjugate complex transposition of the training sequence matrix X^H and the training sequence matrix X (in complex notation), makes "1", or represents a unit matrix having only values of "1" in its diagonal. This depends on the properties or characteristics of the chosen training sequence.

20 Under this approximation, the energy of the signal/symbol can be rewritten to read

$$E(h^H X^H X h)/N = E(h^H h)/N = \left(\sum_i (\text{Re}\{h_i\}^2 + \text{Im}\{h_i\}^2) \right) / N$$

$$25 \quad = E_{\max} \quad \dots (4)$$

with

30 $\text{Re}\{h_i\}$ denoting the real component of the i -th vector component of the channel impulse response h in vector representation,

$\text{Im}\{h_i\}$ denoting the imaginary component of the i -th vector component of the channel impulse response h in vector representation,

35 h denotes the vector of the channel impulse response,

h^H denotes the conjugate complex transposition of the vector of the channel impulse response, and

X represents a training sequence in vector representation, the training sequence being such that the product of the training sequence with its conjugate complex transposition X^H makes "1", and

N representing the length of the sequence Y in equation (3) above.

10 Similarly, the energy E of the received signal/symbol Y can be expressed as

$$E(Y^H Y)/N = (\sum_i (\text{Re}\{y_i\}^2 + \text{Im}\{y_i\}^2))/N = \text{RSSI} \quad \dots (5)$$

15 with

$\text{Re}\{y_i\}$ denoting the real component of the i -th vector component of the received signal y in vector representation,

$\text{Im}\{y_i\}$ denoting the imaginary component of the i -th vector component of the received signal y in vector representation,

y denotes the vector of the received signal, and

y^H denotes the conjugate complex transposition of the vector of the received signal, and RSSI stands for Received Signal Strength Indicator, and

N representing the length of the sequence Y in equation (3) above.

In consideration of the above, the noise energy or variance VAR is then obtained as the difference between the energy of the received signal/symbol RSSI and the energy of the signal/symbol approximately represented by the energy of the impulse response taps of the channel impulse response h

$$35 \quad \text{VAR} = \text{RSSI} - E_{\text{max}} \quad \dots (6)$$

The above equation (6) is a result of the approximations made when deducing the said equation. Nevertheless, this relation provides sufficiently reliable results in almost all cases.

However, a modification of formula (6) can be obtained as follows. Particularly, the energy of the impulse response taps is weighted by a first and a second predetermined factor (weighting factor) a and b, respectively.

Then, a thus modified equation (6) reads

$$\text{VAR} = \text{RSSI} - a * \text{Emax} \quad \dots(7)$$

and

$$\text{ACT_VAR} = \text{MAX}(\text{VAR}, b * \text{Emax}) \quad \dots(8)$$

with ACT_VAR denoting the actual variance to be used in the receiver as a result of the (modified) method according to the present invention being implemented. Specifically, as the actual variance, the maximum value of the variance VAR obtained according to equation (7) and the energy Emax of the impulse response taps weighted with the second predetermined factor b is selected.

The predetermined factors a, b are user specific constants, respectively. It should be noted that upon selection of the weighting factors a, b to equal 1, 0, respectively, the modified method is reduced to the above explained basic method.

The setting of these components is dependent on the environment where the receiver is to be used and may also depend on the characteristics of an equipment used (e.g. thermal noise characteristics of the equipment).

Experiments conducted by the present inventors show, that suitable values for a and b may be $a=0.5$ and $b=1/32$. With the value b , a minimum possible value of the variance VAR is set. Namely, with reference to equation (8), if the value VAR (of equation (7)) is below $b*VAR$, then $b*VAR$ is the bigger value and selected as ACT_VAR because it is the maximum of both values. By limiting VAR or ACT_VAR to a minimum, a quotient of E_{max}/VAR (or E_{max}/ACT_VAR , respectively), is limited to a maximum possible value. From this quotient, in turn, a value of S/N can be derived

Thus, according to the method according to the present invention, the signal variance of the received signal is estimated in an estimation step adapted to implement the functional relationship according to equation (6). Prior to performing this step, an estimation step of estimating the energy/symbol of the received signal $RSSI$ is performed and an estimation step of estimating the energy/symbol of the channel impulse response taps E_{max} is performed. These steps are advantageously adapted to implement functional relationships according to equations (5) and (4), respectively.

According to the above discussed modification, the actual signal variance ACT_VAR of the received signal is estimated in an accordingly modified estimation step which is adapted to implement the functional relationship according to equations (7) and (8).

Subsequently, the corresponding device according to the present invention will be explained in detail with reference to the drawing.

Fig. 1 shows a schematic block circuit diagram of a basic implementation of a device according to the present invention.

5 As illustrated therein, a received signal y transmitted via a transmission path (not shown) is supplied to the device which device forms part of a receiver apparatus.

The received signal y is branched and supplied to a first
10 estimation means 1 and a second estimation means 2, respectively.

The first estimation means is adapted to estimate the energy/symbol of the received signal y , also denoted as
15 RSSI (Received Signal Strength Indicator). This energy can be expressed as $\Sigma|Y|^2$ (Y as the received signal being assumed to be represented as a signal in complex notation). Particularly, the first estimation means 1 is adapted to perform as processing in terms of input / output
20 characteristics as expressed in the above equation (5).

The second estimation means is adapted to estimate the energy/symbol E_{\max} of taps of the channel impulse response h . To this end, the second estimation means 2 comprises a
25 channel impulse response (CIR) estimation unit 2a and a processing unit 2b.

The CIR estimation unit 2a derives the channel impulse response on the basis of the supplied received signal Y and
30 an input training sequence X , which is contained within the data of the received signal, and also known to the device. The known training sequence is input to the CIR estimation unit 2a, for example from a memory unit (not shown) storing respective training sequences.

The design of the channel impulse response estimation unit 2a as such is not critical to the present invention and can be a conventionally known unit, so that a detailed description thereof is omitted here.

5

As a result of the processing performed by the CIR estimation unit 2a, a signal h representing the channel impulse response function and/or the channel impulse response taps is output and supplied to the further processing unit 2b which is adapted to output the energy/symbol E_{\max} of the channel impulse response taps based on the results of the preprocessing of the unit 2a. The energy/symbol E_{\max} can be expressed as $\sum |h^2|$. Particularly, the further processing unit is adapted to perform a processing in terms of input / output characteristics as expressed in the above equation (4). It should always be kept in mind that the indicated signals are vector signals composed of i vector components each, with i being dependent on the FIR channel model expressed by the channel impulse response function h .

10
15
20

The output signals RSSI and E_{\max} provided by the first and second estimation means, respectively, are forwarded to a third estimation means 3.

25

The third estimation means 3 is adapted to derive the signal variance or noise energy on the basis of these two signals supplied thereto. More precisely, the signals RSSI and E_{\max} are respectively supplied to a positive (+) and a negative (-) input terminal of a subtracting unit 3a of said third estimation means 3.

30

The subtracting unit 3a (and/or the third estimation means 3) in the illustrated basic implementation of a device according to the present invention are adapted to perform a

35

processing in terms of input / output characteristics as expressed in the above equation (6). Subsequently, a signal VAR as the signal variance or noise energy is output and thus provided for further use in the receiver device.

5

Now, with reference to Fig. 2, a modification of the basic implementation as shown in Fig. 1 is described.

Since the modification relates only to the third estimation means, a repeated description of the first and second estimation means is considered to be dispensable.

As illustrated in Fig. 2, the modified third estimation means 33 comprises a subtracting unit 33a and additionally comprises a weighting unit 33b. The weighting unit performs a weighting, i.e. a multiplication of the supplied signal E_{max} with predetermined factors a , b , respectively. An output $a \cdot E_{max}$ of the weighting unit 33b is supplied to the negative (-) terminal of the subtracting unit, while the signal RSSI is still supplied to its other, i.e. positive (+) terminal. The subtracting unit is thus adapted to provide as its output signal a signal VAR as expressed by the above equation (7). This signal VAR is output as one of two input signals to an additionally provided selecting means 44 of the device. As the second of two input signals supplied to said selecting means 44, there is supplied an output $b \cdot E_{max}$ of the weighting unit 33b of the modified third estimation means 33.

The selecting means 44 is adapted to output the signal having the larger value of the two input signals as an actual variance ACT_VAR to be used further in the receiver.

The predetermined weighting factors a , b , respectively, can be set by means of a setting means (not shown) as user

specific constants. Particularly in case of setting these factors to $a=1$ and $b=0$, the structure of the modified third estimation means is reduced to the above explained basic structure of the third estimation means. As mentioned
5 above, the specific setting of these components is dependent on the environment where the receiver is to be used and may also depend on the characteristics of an equipment used (e.g. thermal noise characteristics of the equipment). Experiments conducted by the present inventors
10 show, that suitable values for a and b may be $a=0.5$ and $b=1/32$. With the value b , a minimum possible value of the variance VAR is set. Namely, with reference to equation (8), if the value VAR (of equation (7)) is below $b \cdot VAR$, then $b \cdot VAR$ is the bigger value and selected as ACT_VAR
15 because it is the maximum of both values. By limiting VAR or ACT_VAR to a minimum, a quotient of E_{max}/VAR (or E_{max}/ACT_VAR , respectively), is limited to a maximum possible value. From this quotient, in turn, a value of S/N can be derived.

20 Accordingly, as has been described herein above, the present invention proposes a method for estimating a signal variance of a received signal y transmitted via a transmission channel, said method comprising the steps of:
25 estimating the energy $RSSI$ of the received signal y , estimating the energy E_{max} of channel impulse response h taps, and estimating said signal variance VAR of said received signal by subtracting said estimated energy of channel impulse response taps E_{max} from said estimated
30 energy $RSSI$ of said received signal, such that said signal variance is obtained as $VAR = RSSI - E_{max}$, as well as a correspondingly adapted device.

35 It should be understood that the above description and accompanying figures are merely intended to illustrate the present invention by way of example only. The preferred

- 17 -

embodiments of the present invention may thus vary within the scope of the attached claims.

CLAIMS

1. A method for estimating a signal variance of a received signal (y) transmitted via a transmission channel,

5 said method comprising the steps of:

estimating the energy (RSSI) of the received signal (y),

estimating the energy (Emax) of channel impulse response (h) taps, and

10 estimating said signal variance (VAR) of said received signal by subtracting

said estimated energy of channel impulse response taps (Emax) from

15 said estimated energy (RSSI) of said received signal,

such that said signal variance is obtained as:

VAR = RSSI - Emax .

2. A method according to claim 1, wherein

20 said estimated energy (RSSI) of the received signal (y) is represented by the sum of all vector components of the received signal (y) according to a relation of

$$\text{RSSI} = \sum_i (\text{Re}\{y_i\}^2 + \text{Im}\{y_i\}^2) = E(y^H y)$$

25

with

Re{y_i} denoting the real component of the i-th vector component of the received signal y in vector representation,

30

Im{y_i} denoting the imaginary component of the i-th vector component of the received signal y in vector representation,

y denotes the vector of the received signal, and

y^H denotes the conjugate complex transposition of the vector of the received signal.

3. A method according to claim 1, wherein

5 said estimated energy (E_{\max}) of said channel impulse response (h) taps is represented by the sum of all vector components of the channel impulse response (h) according to a relation of

$$E_{\max} = \sum_i (\operatorname{Re}\{h_i\}^2 + \operatorname{Im}\{h_i\}^2) = E(h^H X^H h X)$$

with

15 $\operatorname{Re}\{h_i\}$ denoting the real component of the i -th vector component of the channel impulse response h in vector representation,

$\operatorname{Im}\{h_i\}$ denoting the imaginary component of the i -th vector component of the channel impulse response h in vector representation,

20 h denotes the vector of the channel impulse response, h^H denotes the conjugate complex transposition of the vector of the channel impulse response, and

X represents a training sequence in vector representation, the training sequence being such that the product of the training sequence with its conjugate complex transposition X^H makes "1".

4. A method according to claim 1, wherein

 said step of estimating said signal variance (VAR) of said received signal further comprises

30 a step of weighting said estimated energy of channel impulse response taps (E_{\max}) by a respective first and second predetermined factor (a , b), and wherein

 said estimated signal variance (VAR) is obtained
35 by subtracting

said estimated energy of channel impulse response taps (E_{\max}) weighted with said first predetermined factor (a) from

said estimated energy (RSSI) of said received signal,

such that said signal variance is obtained as:

$$\text{VAR} = \text{RSSI} - a * E_{\max},$$

and said method further comprises a selecting step for selecting the actual estimated variance (ACT_VAR) as the maximum value of said estimated signal variance (VAR) and said estimated energy of channel impulse response taps (E_{\max}) weighted with said second predetermined factor (b), such that the actual estimated variance (ACT_VAR) is obtained as : $\text{ACT_VAR} = \text{MAX}(\text{VAR}, b * E_{\max})$.

5. A method according to claim 4, wherein said predetermined factors are user specific constants.

6. A device for estimating a signal variance of a received signal (y) transmitted via a transmission channel (1), said device comprising:

first estimation means (1) adapted to estimate the energy (RSSI) of the received signal (y),

second estimation means (2, 2a, 2b) adapted to estimate the energy (E_{\max}) of channel impulse response (h) taps, and

third estimation means (3, 3a; 33, 33a) adapted to estimate said signal variance (VAR) of said received signal and comprising a subtracting unit (3a; 33a) adapted for subtracting

said estimated energy of channel impulse response taps (E_{\max}) from

said estimated energy (RSSI) of said received signal,

such that said signal variance is obtained as:

VAR = RSSI - Emax .

7. A device according to claim 6, wherein

said estimated energy (RSSI) of the received signal
 5 (y) is represented by the sum of all vector components of
 the received signal (y) according to a relation of ..

$$\text{RSSI} = \sum_i (\text{Re}\{y_i\}^2 + \text{Im}\{y_i\}^2) = E(\mathbf{y}^H \mathbf{y})$$

with

10 $\text{Re}\{y_i\}$ denoting the real component of the i-th vector
 component of the received signal y in vector
 representation,

$\text{Im}\{y_i\}$ denoting the imaginary component of the i-th vector
 component of the received signal y in vector

15 representation,

y denotes the vector of the received signal, and

\mathbf{y}^H denotes the conjugate complex transposition of the
 vector of the received signal.

20 8. A device according to claim 6, wherein

said estimated energy (Emax) of said channel impulse
 response (h) taps is represented by the sum of all vector
 components of the channel impulse response (h) according to
 a relation of

25
$$\text{Emax} = \sum_i (\text{Re}\{h_i\}^2 + \text{Im}\{h_i\}^2) = E(\mathbf{h}^H \mathbf{X}^H \mathbf{h} \mathbf{X})$$

with

$\text{Re}\{h_i\}$ denoting the real component of the i-th vector
 component of the channel impulse response h in vector
 30 representation,

$\text{Im}\{h_i\}$ denoting the imaginary component of the i-th vector
 component of the channel impulse response h in vector
 representation,

h denotes the vector of the channel impulse response,

h^H denotes the conjugate complex transposition of the vector of the channel impulse response, and X represents a training sequence in vector representation, the training sequence being such that the product of the training sequence with its conjugate complex transposition X^H makes "1".

9. A device according to claim 6, wherein

said third estimation means (33, 33a) adapted to estimate said signal variance (VAR) of said received signal further comprises

a weighting unit (33b) adapted of weight said estimated energy of channel impulse response taps (Emax) by a respective first and second predetermined factor (a, b), and

said subtraction unit (33a) outputs said estimated signal variance (VAR) as the result of subtracting

said estimated energy of channel impulse response taps (Emax) weighted with said first predetermined factor (a) from

said estimated energy (RSSI) of said received signal,

such that said signal variance is obtained as

$$VAR = RSSI - a * Emax,$$


and said device further comprises


a selecting means (44) adapted to select the actual estimated variance (ACT_VAR) as the maximum value of said estimated signal variance (VAR) and said estimated energy of channel impulse response taps (Emax) weighted with said second predetermined factor (b), such that the actual estimated variance (ACT_VAR) is obtained as

$$ACT_VAR = MAX(VAR, b * Emax) .$$

10. A device according to claim 9, wherein said predetermined factors are user specific constants.

1/2
FIG. 1

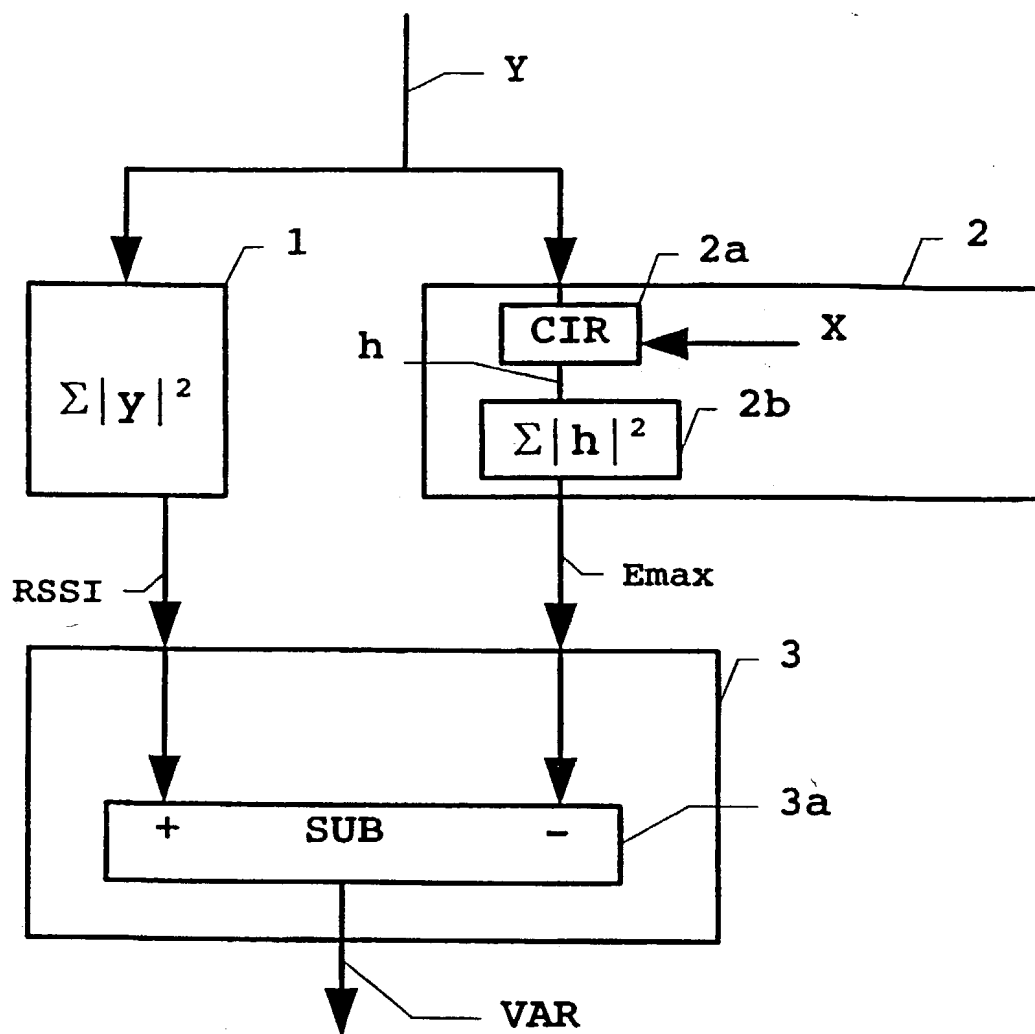

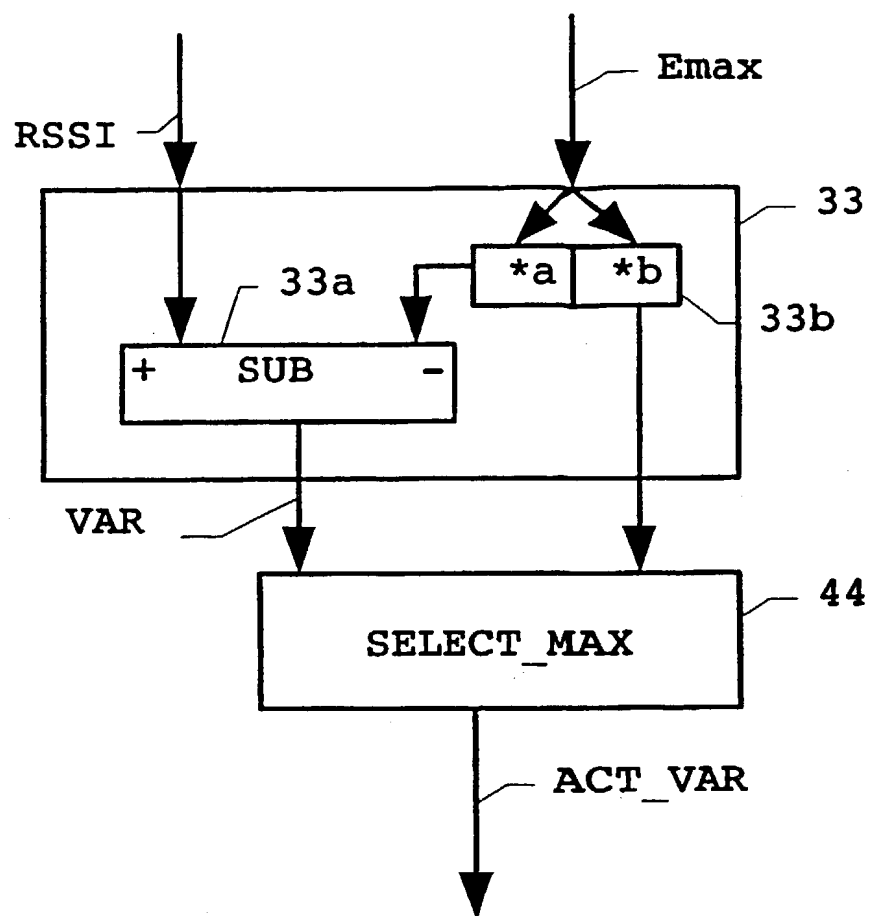2/2
FIG. 2

INTERNATIONAL SEARCH REPORT

Inter. Appl. No.

PCT/EP 99/03383

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L1/20 H04B17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 199 047 A (KOCH WOLFGANG) 30 March 1993 (1993-03-30) abstract; figure 1 column 2, line 8 - last line column 5, line 3 -column 6, line 48; figure 2 ---	1-3,6-8
A	WO 97 08841 A (NOKIA TELECOMMUNICATIONS OY ;PIIRAINEN OLLI (FI)) 6 March 1997 (1997-03-06) cited in the application abstract; figures 2,5 page 3, line 10 -page 4, line 11 page 8, line 30 -page 11, line 26 --- -/--	1-3,6-8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

7 February 2000

Date of mailing of the international search report

11/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sieben, S

INTERNATIONAL SEARCH REPORT

Inter. Application No

PCT/EP 99/03383

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 97 41702 A (NOKIA TELECOMMUNICATIONS OY ;PIIRAINEN OLLI (FI)) 6 November 1997 (1997-11-06) abstract; figure 2 page 3, line 33 -page 5, line 27; figure 3 -----</p>	1,3,6,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/EP 99/03383

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5199047	A	30-03-1993	DE 4001592 A	02-05-1991
			DE 59010213 D	25-04-1996
			EP 0428199 A	22-05-1991
			JP 3208421 A	11-09-1991
WO 9708841	A	06-03-1997	FI 954053 A	01-03-1997
			AU 710798 B	30-09-1999
			AU 6743596 A	19-03-1997
			EP 0872018 A	21-10-1998
			JP 11511602 T	05-10-1999
			NO 980871 A	27-02-1998
WO 9741702	A	06-11-1997	FI 961796 A	27-10-1997
			AU 2571397 A	19-11-1997
			CN 1217128 A	19-05-1999
			EP 0891678 A	20-01-1999
			NO 984938 A	23-10-1998